


DIVIDUAL



DIVIDUAL ETI™



THE **DIVIDUAL ETI** IS A REAL-TIME **ETI STREAM RECORDER AND PLAYER** IN A **POCKET-SIZED** AND **ROBUST** DEVICE.

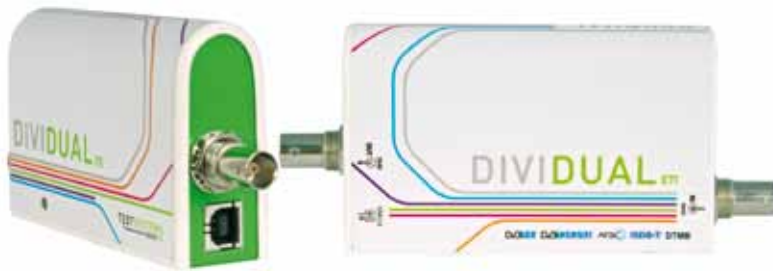

CHARACTERISTICS

1x ASI input and 1x ASI output for DAB/DAB+/T-DMB
ETI NI (G703) supported
ETI NA5592 & NA5376 (G704) supported
Playlist/segment/loop play mode
Scheduled recording
Player/Recorder command line software
Compatible MS Windows XP/Vista/7
USB self-powered, 140 g

- TO TEST APPLICATIONS
- TO ACHIEVE COST-EFFICIENCY ON BROADCAST NETWORKS

TECHNICAL CHARACTERISTICS

DVB-ASI	
Connector In	1 x BNC female - 75 Ω
Connector Out	1 x BNC female - 75 Ω
Max bitrate	2048 Kbps
USB Data connector	
	1 x USB2 B-Type
Power supply	
	USB self-powered
Environment	
Operating temperature	-20 to +55 °C / -4 to 131 °F
Physical	
Dimensions	115 x 62 x 27 mm / 4.5 x 2.4 x 1 in
Weight	140 g

APPLICATIONS

- DAB, DAB+ or T-DMB Broadcast chain testing
- Portable Demonstration Setup
- R&D Streams Record and Playback

BENEFITS

- 2-in-1 product: Baseband Recorder + Player
- **Compact** (115 x 62 x 27 mm, **140 g**) and USB self-powered device
- Command line package for automated testing
- ETI-G703/G704 support
- Configurable play and record modes

STREAM RECORDING/PLAYING

Standard and scheduled recording
Loop/segment play modes
Stream playlist handling

ORDERING CODE

DiviDual ETI DAB, DAB+, T-DMB Recorder, Player
Shipped bundled with DiviSuite ETI software for MS Windows XP/Vista/7

sales@enensystest.com

www.enensystest.com