

ATLAS™ 1.5 Packaging Server


Powerful second generation “turnkey” live and VOD streaming server for few to many content distribution. This is an affordable “ready to go” appliance that enables you to stream live and on-demand events to many subscribers from any H.265 or H.264 encoder or IP camera. This is much more convenient than purchasing software and configuring software to match hardware you may have or purchase. We offer flexible factory technical support as well. Supports 700 users simultaneously at 1 mbps. Supports transport stream, RTSP, or RTMP inputs and serves these as HLS, RTMP, DASH, and MPEG-TS streams. This unit is ideal for corporate communications, religious and faith-based institutions, schools, museums, festivals and special events, and video bloggers. All you need is suitable bandwidth to support simultaneous users.

Features

- Ingests H.265 or H.264 transport streams (TS) from any encoder
- Ingests HLS or RTMP from any streaming encoder
- Ingests H.265 or H.264 RTSP from any IP camera
- Easy-to-use browser Config dashboard
- Outbound Protocols: HTTP Live Streaming (HLS), RTMP, MPEG-DASH, MPEG-TS
- Sends live or stored adaptive bitrate video feeds to any device that supports HLS or MPEG-DASH
- Converts unicast streams to multicast streams, or other direction
- Includes Catch-up TV and live timeshift functionality (rewind/fast forward) via HLS, creates X hour buffer and continuously cleans up old files
- File formats supported for VOD: TS and MP4
- Server Side Ad Insertion with HLS – Server inserts pre-encoded ads based on schedule or with SCTE markers. Dynamically targets ads at specific users.
- Can live within firewall
- Ships as a turnkey appliance
- Price includes two hour factory Config assistance
- Supports both unicast and multicast outputs
- ATLAS I's can do content discovery among multiple ATLAS I's
- Compatible with Verimatrix® VCAS™ and Widevine® DRM's
- Adds subtitles for closed captioning or multiple languages
- Fully Cloud manageable
- Supports Android™ private channels
- Easy FTP transfer of media for VOD of stored content
- REST and SOAP SDKs are available
- Comparable to well known streaming engine solutions that arrive as software-only solutions

Applications

- Over the Top TV (OTT)
- Streaming festivals and special events
- Live Streaming support for small, mid-sized IPTV deployments
- Multiscreen Content delivery
- Education Video Server
- Cruise Ship Video Server
- Ethnic Channel Video Server
- STADIUMS and Public Venues
- Ingest from DISH PD-1600 and output Widevine® or Verimatrix®

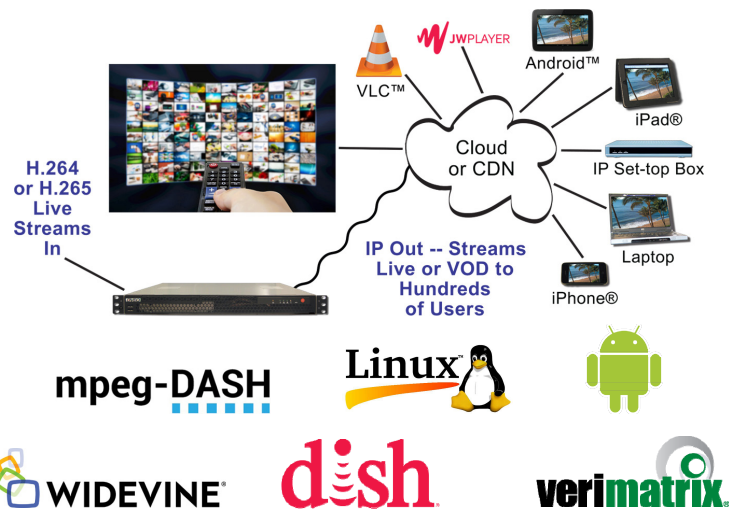

Overview

Packagers are the newly respected Swiss Army Knife of the streaming industry. They are designed to segment H.264 transport streams into pre-determined chunks and package or wrap the segmented streams into HLS or DASH. A third function they are tasked with is serving these streams to thousands of users simultaneously. Packagers often also apply DRM or content protection keys to secure the streams. We support DAES-128, VCAS™ (Verimatrix®), and Widevine® output. We can import DISH or Vubiquity™.

Packagers are typically fed the required profiles via HLS or TS from origin encoders or transcoders. They do not typically encode or transcode. They are designed to keep track and feed segments used by clients.

Our packaging server does more than many others. We support non-segmented outputs as well as segmented outputs. We also support "Go Back TV" functionality in our servers.

DVEO's ATLAS 1.5 Packaging Server supports third party encoders and transcoders, including Harmonic®, Elemental®, and Envivio®. Our packager also works seamlessly with our Brutus™ or Gearbox™ profilers/ gateways. This allows you to re-use encoded TS or HLS content from anywhere as long as the resolutions needed are available.

Packaging is crucial in today's mobile oriented environment. Chunks help alleviate problems associated with bandwidth changes and mitigate out-of-order packets. This bit rate adjustment technique ensures that mobile devices are supported with the best possible video quality at all times. This is critical since there are now almost 2 billion mobile devices out there that need to be fed.

As of June 2017, ATLAS servers support Android™ private channels.


Digital Video ExtraOrdinaire™
Computer Modules, Inc.
11409 West Bernardo Court
San Diego, CA 92127
Tel: 858-613-1818 Fax: 858-613-1815
www.dveo.com

Benefits of Packaging Servers

- Designed for adaptive streaming protocols like HLS and DASH
- Offloads CDNs so local users pull content from local packaging servers
- Provides for re-use of live feeds for VOD delivery


Benefits of Media Servers

- Serve thousands of users
- Provide encryption services to each stream

Features Matrix

Feature	Broadpeak®	DVEO® ATLAS™
HLS Input	No	Yes
Smooth Input	Yes	No
FMP4 VOD	Yes	Soon
Adaptive TS input	Yes	No
HLS output	Yes	Yes
Dash output	Yes	Yes
HDS output	Yes	No
Smooth output	Yes	No
Time Shift output	Yes	Yes
Start over/Catchup	Yes	Yes
DRM Encryption	AES128, Playready	AES128
DRM Vendor	Verimatrix®, Widevine®, BuyDRM™	Verimatrix®, Widevine®, BuyDRM™


Sample of GUIs

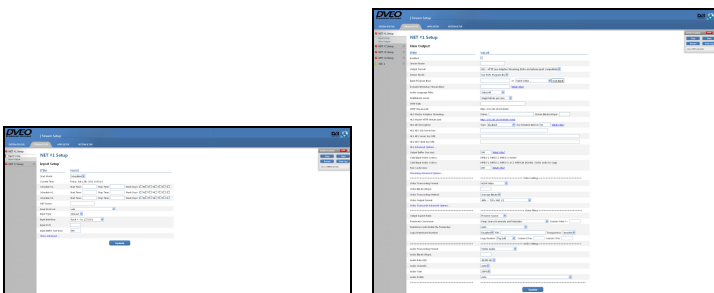

Scheduled IP Input Setup

IP Output Setup

Throughput

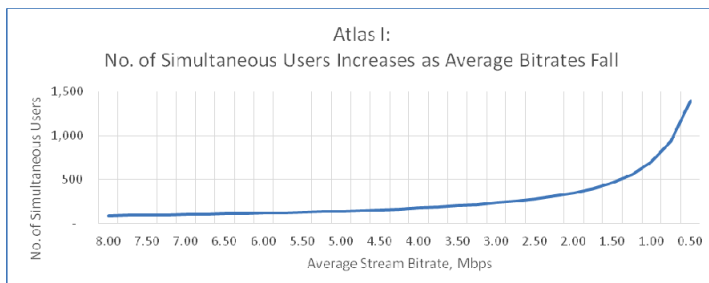

Interfaces

Web User Interface (HTTP and HTTPS)
SSH for CLI Access
SNMPv2 for Monitoring and Alerts
SOAP API for the System <ul style="list-style-type: none"> • Statistics • Management of Stream Adaption Profiles and Stream Adaption Families
SOAP API for Live <ul style="list-style-type: none"> • List of the channels • Creation/configuration of channels • Statistics on channels
SOAP API for VOD <ul style="list-style-type: none"> • List of the contents • Creation/configuration of contents and associated jobs processing • Statistics on contents

Input/Output



LAN WAN
(Either can be used for IP Input or Output)

Example Ports

HTTP/HLS/DASH/Smooth	Port 80 or 8080
RTMP/Flash	Port 1935

Catch Up

Atlas 1.5 uses variable sized buffers. This means we provide a 1-X hour buffer for each program. Each user then can pause and/or go back in their buffer and watch segments again should the person be interrupted or wish to restart the program at an earlier point in the timeline.

DVEO
Digital Video ExtraOrdinaire™
Computer Modules, Inc.
11409 West Bernardo Court
San Diego, CA 92127
Tel: 858-613-1818 Fax: 858-613-1815
www.dveo.com

Supported Input Devices

Arris®, Cisco®, Ericsson®, Harmonic®, LiveShell Pro™, Matrox®, Spark-E™ HDMI/IP, Teradek®, Wirecast™, DVEO Brutus™, DVEO Gearbox™
 New: TV APPMAKER™ – Direct support for Android™ private channels

Supported Output Devices

Any device that runs HLS or DASH: This includes all Apple®, Android™, and Chrome ® based devices.

General DRM + CAS Support

Verimatrix® VCAST™, Microsoft PlayReady, Widevine®, BISS, Simulcrypt standard (ECMG), AES-128 Encryption
 Hospitality Oriented Support: DISH Simulcrypt in from PD-1600
 Input: Simulcrypt
 Output: Widevine or Verimatrix

Ordering Information

ATLAS Options

ATLAS I Packaging Server	<ul style="list-style-type: none"> Small affordable live streaming and VOD server
ATLAS 1.5 Packaging Server	<ul style="list-style-type: none"> 1 RU live streaming and VOD server
ATLAS II Packaging Server: TELCO	<ul style="list-style-type: none"> Live and stored asset server 1 RU rackmount 1 10Gbps and 2 each 1 Gbps Ethernet 1 TB SSD
ATLAS III Packaging Server: TELCO	<ul style="list-style-type: none"> 3 RU rackmount 4 10 Gbps and 2 1 Gbps Ethernet Optional Android/iOS/PC Players
Optional DOZER™ Packet Loss Correction	<ul style="list-style-type: none"> Optional DOZER™ Automated UDP Packet Recovery protocol, enabling error-free video delivery over UDP

Specifications

IP Input

Input protocols:	HLS cache, HLS push via web dev, Multi-bitrate input/output file, RTMP, RTSP, MPEG-TS (UDP), HLS, TS, MP4
------------------	---

IP Output

Output protocols:	HTTP Live (HLS), RTMP, MPEG-DASH, MPEG-TS
-------------------	---

Some Supported Resolutions – Input and Output

1920 x 1080	720 x 480	480 x 480	qHD
1280 x 720	704 x 480	480 x 320	H.264up
720 x 576	640 x 480	320 x 240	

Also supports any custom resolution not listed here, including computer formats like 1280 x 1024, etc. Note: Supports closed captions.
 H.265 output resolutions supported are 1080, 720, 576, 480.
 H.265 576/480 resolutions only have 4:3 aspect ratio.


Administration

Access:	Web interface, SSH (Secure command line interface)
SNMP:	Monitoring and alerts
Scheduling:	On, Off support for timeslots

CPU and Operating System

CPU:	Intel® Xeon® processor
OS:	DVEO embedded Linux® on SSD
Hard Drive:	8 GB RAM
Memory:	120 GB SSD Intel, Optional 1 TB

Physical & Power

Size – 1 RU high (W x D x H):	19 x 14.96 x 1.7 inches 483 x 380 x 43.4 mm
Voltage:	100-240V, 4-2A, 60-50 Hz, 220 watts
Operating Temperature:	10°C to 35°C
Non-operating Humidity:	20% to 90% non-condensing
Weight:	15 lbs. (6.8 kg)
Conformities:	UL, BSMI, CSA, FCC, CE, RoHS 

Security

Ports security scanned to MIL requirements prior to shipment

Ad Insertion

SCTE Ad Marker insertion via RS232, USB, IP, Contact closures