


DVB Master™ III Tx PCIe

Enhanced DVB-ASI PCI Express Transmit Interface Card with Fine Tuning, Auto Null Packet Insertion, Accurate Clock (25 ppm), and Jitter Management in Firmware

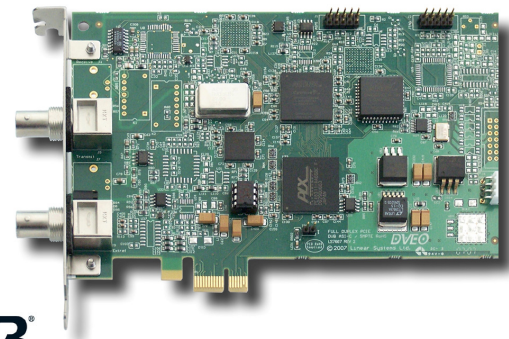

Features

- 213 Mbps DVB-ASI transmitter on a single PCIe card
- Low Jitter rate control with optional interbyte stuffing
- PCIe 1.0a compliant interface bus
- Software-controlled Transmit Clock selection:
 - On-board oscillator (27 MHz)
 - External clock input (27 MHz)
- Transmit Clock Output (via header)
- Automatic stuffing of null PID packets via firmware
- Drivers for Windows® 7 – 32 and 64 bit, Server 2003, Server 2008, Windows® 2000, Windows® XP, and Linux®
- Windows® XP/Server 2003/Server 2008/Linux® API
- DirectShow filter®
- Proven third generation design
- Optional High Stability Oscillator (2.5 ppm)
- Silicon serial number
- Advanced Transmit Capabilities:
 - Transmitter Packet Size – 188 or 204 bytes
 - Reed-Solomon Conversion
 - Transmitter Fine Tuning (FT)
 - Fine Control PCR Pacing
 - Null Packet Insertion

Applications

- MPEG-2 Transport Stream Video Server/Generator
- MPEG-2 Transport Stream Repurposing
- SI Table Insertion for Private Data Broadcasting
- High Definition HDTV - Servers
- Electronic Program Guide Table Insertion
- IP over MPEG data encapsulation

Overview

DVB-ASI is a physical interconnect standard created by the international standardization group known as the DVB Project (www.dvb.org). It is designed to carry MPEG-2 transport streams between devices at a maximum rate of 2... Mbps. The actual signaling rate of DVB-ASI is 270 Mbps, but there is overhead from the data encoding scheme and the maximum payload ends up being approximately 213 Mbps.

Transport streams are essentially packetized MPEG streams with tables embedded every 100 ms or so, which tell the ultimate MPEG decoder how to decode the stream.

Furthermore, transport streams may be combined or multiplexed to create multiprogram transport streams with separate PIDs, or program identifiers, that distinguish them as “channels” do in analog television.

We have incorporated as many features as possible into this PCIe card. With all these features, our customers can create very powerful workstations that can process transport streams “on the fly” for applications such as broadcasting, cable TV, satellite links, video servers, and distance learning.

Highlights

- Driver software is available for Windows® 7 – 32 and 64 bit, Server 2003, Server 2008, Windows® 2000, Windows® XP, and Linux®. The source code is available for the Linux® driver.
- Optional high stability oscillator with less than 2.5 ppm drift, meeting ATSC specifications.



Computer Modules, Inc.
11409 West Bernardo Court
San Diego, CA 92127


Tel: 858-613-1818 Fax: 858-613-1815

www.dveo.com

Specifications

Dimensions	
Width:	4.4 in (11.18 cm)
Length:	6.6 in (16.76 cm)
Thickness:	0.58 in (1.47 cm)
Typical Weight	4.0 oz (113.3 g)
Output Connectors	75 Ohm BNC
External Clock Input	75 Ohm DC Blocked ECL, 27 MHz
Data Output	DVB-ASI Coaxial, 2 kbps to 213 Mbps Data Rate
Power Requirements	12V/3.3V, 100mA@3.3V, 20mA@12V
Operating Temperature	0 to 55° C
Operating Humidity	To 90%, Non-condensing
Status LED Indicators	Tx
Transmit FIFO Size	2 Kbytes eliminates DMA latency
Bus Interface	Single Lane (x1) PCIe 1.0a
Standard Oscillator Stability	± 25 ppm
Optional High Stability Oscillator	± 2.5 ppm

Block Diagram

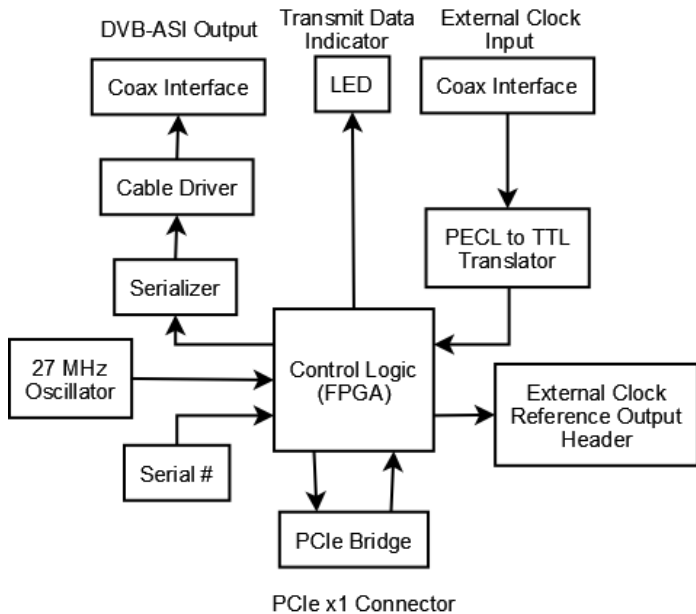

Capabilities

Transmitter Fine Tuning – The normal inter-byte (IB) and inter-packet (IP) stuffing options available with the DVB-ASI standard cannot be used for fine rate control. In some applications, such as reading files from a disk, it may be desirable to use stuffing to control the transmission rate of the stream in order to match the rate required by the Program Clock Reference (PCR) of a Transport Stream. Because of this, we have developed the Fine Tuning (FT) feature. Fine Tuning is accomplished by first setting the standard IP and IB to select a rate as close to the desired rate as possible. Then the FT parameter can be set to bring the rate within 2.5ppm of the target. This method of rate control works with small Tx buffers and gives minimum latency.

Clock Source Options – The transmit clock options include the 27 MHz External Clock and an Internal Clock.

Indicator LEDs – Indicator LEDs are provided on the bracket to show transmitter operation. The LED will flash to indicate when valid data is being transmitted on that channel.

Null Packet Insertion – Under software control but performed by hardware, "null packets" are automatically inserted into the bit stream.

PCR Pacing – Firmware support is available for releasing PCR packets at the correct PCR time, using software-created time stamps. This method ensures that the transmit rate and PCR timing are the same as the original transport stream.

Reed-Solomon Conversion – The software can be set to have hardware add 16 bytes filled with zeros to 188-byte packets to create a 204-byte packet stream.

Conformity to DVB Standards – The DVB Master III Tx PCIe meets CENELEC EN50083-9: 1998 – Cable distribution systems for television, sound and interactive services – Part 9: Interfaced for CATV/SMATV headends and similar professional equipment for DVB/MPEG-2 transport streams.

Customizability – Room in large FPGA for your custom functions.

Ordering Information

DVB Master III Tx PCIe (Model 155)
 DVB Master III Tx PCIe/HSO High Stability Oscillator

© 2011 Computer Modules, Inc. DVEO and DVB Master are trademarks of Computer Modules, Inc. DVB is a registered trademark of the DVB Project. All other trademarks and registered trademarks are the properties of their respective owners. All rights reserved. Specifications are subject to change without notice.



Computer Modules, Inc.
 11409 West Bernardo Court
 San Diego, CA 92127
 Tel: 858-613-1818 Fax: 858-613-1815
www.dveo.com