

Furano DVB-S-S2/HD-SDI+HDMI™

Broadcast DVB-S-S2 Demodulator with High Bit Rate 1080p SD or HD 4:2:0 and 4:2:2 MPEG-2 and H.264 Broadcast Contribution Decoder with Magnum Semi Chip for Superb Quality at 100 ms Latency. Supports Static PSIP. Amazing Quality at Near Half the Price of Other Major Brands of Mezzanine Decoders. DVB-S, DVB-S2, ASI, or IP In and Component, Composite, HDMI, SD-SDI, and HD-SDI Out. Full Control from Front Panel Buttons and Included LCD. Supports All Industry Standard MPEG-2 and H.264 Video Formats. Audio Support Includes AAC and AC-3. Full Support for SNMP Management.



Features

- Inputs: DVB-S, DVB-S2, DVB-ASI, IP input (UDP/IP or RTP/IP)
- Optional other RF input – choice of QAM, 8VSB, or DVB-T
- Decodes ASI and/or IP to Analog, HDMI, or HD/SD-SDI video
- Companion decoder for our Futura II™ and Futura III™ encoders
- Outputs: HDMI, HD/SD-SDI video, Composite (CVBS), Component (optional)
- Ultra Low latency – 100 milliseconds
- Supports 4:2:0 (8 bit) and 4:2:2 (10 bit)
- Digital, Analog and SDI/HD-SDI embedded audio outputs with 4 audio pairs
- Aspect ratio conversion (4:3, 16:9)
- Magnum chip based – results in incredible quality
- Control of Frame rate, Image enhance, Phase Noise, Correction of Color, Control of Gamma
- Audio decoding: Dolby® Digital® (AC-3), MPEG-1 Layer II, AAC-LC, HE-AAC
- CBR or VBR outputs
- User selectable resolution and bit rate
- Resolutions: 480i 29.97, 576i 25, 720p 50/59.94, 1080i 25/29.97, 1080p 25/29.97
- Supports NTSC or PAL
- Control and monitoring via web browser, front panel, or SNMP

Applications

- Satellite Off Air Receiver
- MPEG-2/4/H.264 HD Decoder
- Decoding analog, HDMI, or HD/SD-SDI video after transmitting over IP
- Converting IP streams to HD-SDI

Overview

MPEG-2 is now the de facto standard codec for Broadcast, Satellite, and Cable content distribution in many parts of the world. H.264 is the emerging standard for broadcast "contribution".

The Furano DVB-S-S2/HD-SDI+HDMI™ is a Broadcast oriented low latency MPEG-2 and H.264 decoder that supports all of the standard broadcast formats used throughout the world, including all North American standards.


The unit supports DVB-S, DVB-S2, ASI, and IP input, and HD-SDI, HDMI, and CVBS outputs. Other optional RF input and/or optional YPbPr output is available. The ten bit decoding results in richer color spaces and super crisp video.

Support for embedded audio includes Dolby® Digital® (AC-3), MPEG-1 Layer II, AAC-LC, and HE-AAC.

The Furano is Magnum chip based. Magnum Semiconductor now produces one of the world's best quality encoder chips.

This unit implements 4:2:2 decoding at 100 milliseconds latency. This is unusual since low latency is hard to implement. 4:2:2 color space is often specified for contribution type video distribution.

Sample GUI

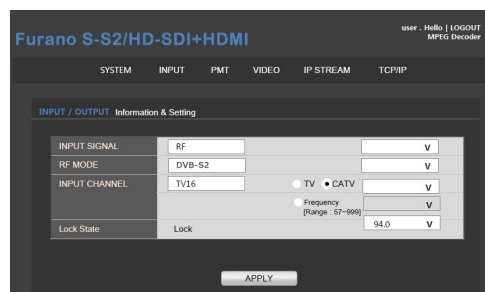


Computer Modules, Inc.

**11409 West Bernardo Court
San Diego, CA 92127**

Tel: (858) 613-1818 Fax: (858) 613-1815

www.dveo.com

Rear View

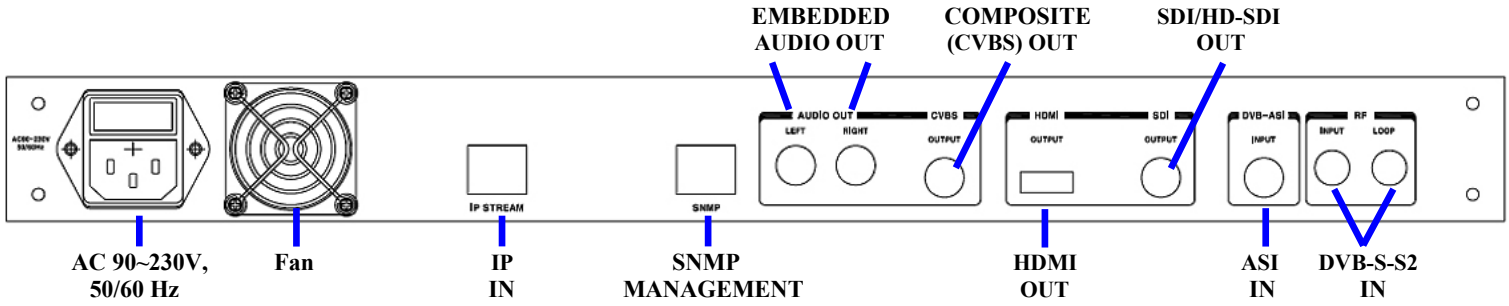

Specifications

DVB-ASI Input

| | |
|-------------------|------------------------------------------------|
| Transport Stream: | DVB-ASI, one port |
| Packet Format: | 188 Bytes |
| Connector: | BNC (75Ω) |
| TS Bit Rates: | MPEG-2: 2.5~55 Mbps MPEG-4 AVC: 2.5~55 Mbps |

RF Input

| | |
|------------------|----------------------------------------------------------|
| Frequency Range: | 54~864 MHz (DVB-S, DVB-S2, or optional QAM, 8VSB, DVB-T) |
| Input Channel: | One channel |
| Impedance: | 75Ω |
| Input Level: | -25~25 dBmV |
| Return Loss: | ≥ 17 dB |
| Noise Figure: | VHF 7dB, UHF 9dB |

IP TS Input

| | |
|--------------------|------------------------------------------------|
| IP Stream: | One port |
| Connector: | RJ-45 |
| Ethernet Type: | 10/100/1000 Base-T |
| Format: | UDP/IP, RTP/IP |
| IP Address Format: | Multicast, Unicast |
| TS Bit Rates: | MPEG-2: 2.5~55 Mbps MPEG-4 AVC: 2.5~55 Mbps |
| BISS: | Supports BISS encryption |

Video Decoding

| | |
|-----------------|-------------------------------------------------------|
| Decoding: | MPEG-2 HP@HL, MP@HL, MP@ML MPEG-4 AVC HP@L4, MP@L3 |
| Bit Rates: | MPEG-2: 2~50 Mbps MPEG-4 AVC: 0.5~50 Mbps |
| Chroma Formats: | 4:2:0 (8 bit), 4:2:2 (10 bit) |
| Bit Rate Modes: | CBR, VBR |
| Latency: | 100 milliseconds |

Regulatory Certificates



Ordering Info

Furano DVB-S-S2/HD-SDI+HDMI
 Furano DVB-S-S2/HD-SDI+HDMI/CVBS: With optional component (YPbPr) output
 Furano DVB-S-S2/HD-SDI+HDMI/RF: With optional RF input – choice of QAM, 8VSB, or DVB-T

Audio Decoding

| | |
|--------------------------------|---------------------------------------------|
| Sampling Rate: | 32, 48 KHz |
| Dolby® Digital® AC-3 (5.1 Ch): | 128, 192, 256, 384, 448, 512, 576, 640 Kbps |
| MPEG-1 Layer II: | 192, 224, 256, 320, 384 Kbps |
| MPEG-4 AAC-LC: | 32~384 Kbps |
| MPEG-4 HE-AAC v1: | 32~192 Kbps |
| MPEG-4 HE-AAC v2: | 32~96 Kbps |

Audio Output

| | |
|-----------------|---------------------------------------------------------------------------|
| Analog Output: | Output: One stereo Frequency Range: 20 Hz ~ 20 KHz Impedance: 600 Ω |
| Digital Output: | Output: Embedded SDI/HDMI (4 stereo/8ch) Sampling Rate: 32, 48 KHz |
| Optical Input: | SPDIF (7.1 Channel) (Pass Through) |

Video Output

| | |
|-----------------|--------------------------------------------------------------------|
| Analog Output: | Composite (CVBS), Optional Component |
| Digital Output: | HDMI, SDI (NTSC or PAL) |
| Resolutions: | 480i 29.97, 576i 25, 720p 50/59.94, 1080i 25/29.97, 1080p 25/29.97 |
| Aspect Ratio: | 4:3, 16:9 |

Ethernet

| | |
|-----------------|---------------|
| Connector: | RJ45 |
| Interface Type: | 10/100 Base-T |
| Protocols: | SNMP |

Control and Monitoring

| | |
|---------|------------------------------------|
| Local: | Front panel operation, LCD display |
| Remote: | SNMP, HTTP (Web Interface) |

Physical and Power

| | |
|------------------------|----------------------------------|
| Power Supply: | AC 90~230V, 50/60 Hz |
| Power Consumption: | Max. 100W |
| Dimensions – WxHxD: | 19x1.7x15 inches (48 x44x383 mm) |
| Weight: | 8.82 lbs (4 Kg) |
| Operating Temperature: | 14 to 122 °F (-10~50°C) |
| Conformities: | FCC, CE, LVDS, RoHS |